

Nylon Cable Gland



Model: CAGL

Material: Nut, Locknut and Body are made from UL-certified nylon 66, 94V-2. Seal and Gasket are made from NBR.

Standard Colors: Grey, black, other colors are available on request.


Protection Degree: IP68 (used with Washer)

Operation Temperature: -40°C to +100°C,
maximum instantaneous temperature up to 120°C.

Installation: With special design and good tensile strength, cables can be directly inserted into the hole of the same size thread and then fix it with the Locknut.

Application: Used for fixing cables and provide the effective protection against dust, water, oil penetrating the electrical distribution box, electromechanical control panel and other instruments. Innovative design for the Seal and Clamp, wide clamping range, strong resistance against the tensile strength and thus it can protect cables effectively

Specification

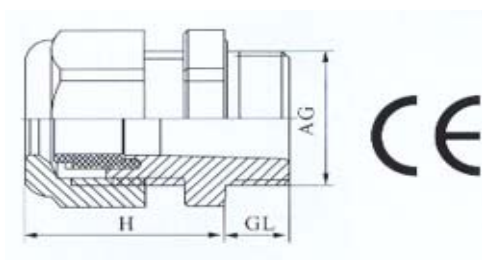

Thread	Cable Range		AG(mm)	Panel Mounting Hole (mm)	GL(m)	H(mm)	Spanner(mm)
	Min.(mm)	Max.(mm)					
PG7	3	6.5	12.5	12.7	8	22	16
PG7	2	5	12.5	12.7	8	22	16
PG9	4	8	15.2	15.4	8	26	19
PG9	2	6	15.2	15.4	8	26	19
PG11	5	10	18.6	18.8	8	27	22
PG11	3	7	18.6	18.8	8	27	22



PG13.5	6	12	20.4	20.6	9	28	24
PG13.5	5	9	20.4	20.6	9	28	24
PG16	10	14	22.5	22.7	10	30	27
PG16	7	12	22.5	22.7	10	30	27
PG19	12	15	24	24.2	10	30	27/28
PG19	10	12	24	24.2	10	30	27/28
PG21	13	18	28.3	28.5	10	35	33
PG21	9	16	28.3	28.5	10	35	33
PG25	16	21	30	30.2	11	34	35/36
PG25	13	18	30	30.2	11	34	35/36
PG29	18	25	37	37.2	12	40	41/42
PG29	13	20	37	37.2	12	40	41/42
PG36	22	32	47	47.2	14	48	52/53
PG36	20	26	47	47.2	14	48	52/53
PG42	32	38	54	54.2	14	49	60/61
PG42	25	31	54	54.2	14	49	60/61
PG48	37	44	59.3	59.5	14	50	64/65
PG48	29	35	59.3	59.5	14	50	64/65
PG63	42	50	70	70.2	27	60	72
M12*1.5	3	6.5	12	12.2	8	22	16
M12*1.5	2	5	12	12.2	8	22	16
M14*1.5	4	8	14	14.2	8	26	19
M14*1.5	2	6	14	14.2	8	26	19
M16*1.5	4	8	16	16.2	8	26	19
M16*1.5	2	6	16	16.2	8	26	19
M16*1.5	5	10	16	16.2	8	27	2
M16*1.5	3	7	16	16.2	8	27	22
M18*1.5	5	10	18	18.2	8	27	22
M18*1.5	3	7	18	18.2	8	27	22
M20*1.5	6	12	20	20.2	9	28	24
M20*1.5	5	9	20	20.2	9	28	24
M20*1.5	10	14	20	20.2	10	30	27
M20*1.5	7	12	20	20.2	10	30	27
M22*1.5	10	14	22	22.2	10	30	27
M22*1.5	7	12	22	22.2	10	30	27
M24*1.5	12	15	24	24.2	10	30	27
M24*1.5	10	12	24	24.2	10	30	27
M25*1.5	13	18	25	25.2	10	35	33
M25*1.5	9	16	25	25.2	10	35	33
M27*1.5	13	18	27	27.2	10	35	33
M27*1.5	9	16	27	27.2	10	35	33
M30*1.5	16	21	30	30.2	11	34	35/36
M30*1.5	13	18	30	30.2	11	34	35/36
M32*1.5	18	21	32	32.2	11	34	36/37
M32*1.5	18	25	32	32.2	12	40	41/42

ADD: Floor 1, Building C, ShiFeng Technology Park, HuaNing Rd,
DaLang, LongHua District, Shenzhen, China, 518109

TEL: +86-755-61653518

FAX: +86-755-61653519

E-mail: sales@dicore.cn

Website: www.dicoretubing.com



M36*1.5	18	25	36	36.2	12	40	41
M36*1.5	13	20	36	36.2	12	40	41
M40*1.5	22	32	40	40.2	14	48	52/53
M40*1.5	20	26	40	40.2	14	48	52/53
M50*1.5	32	38	50	50.2	14	49	60/61
M50*1.5	25	31	50	50.2	14	49	60/61
M63*1.5	37	44	63	63.2	14	50	67