

Nylon Cable Tie



Model: NCTI

Material: Nylon 66,94V-2 certified by UL. Heat and erosion resistant, insulating, durable and not apt to age.


Operation Temperature: -35°C to 85°C .

Color: Natural (white, standard color), UV black and other colors are available as requested.

| Spec. (mm) | (L) | | Max. Bundle Dia. (E) mm | (W) mm | Min. Tensile Strength | | Packing |
|---------------|-----|-------|-------------------------------|-----------|-----------------------|-----|---------------------|
| | mm | mm | | | lbs | kgs | |
| 3×60 | 60 | 2.4" | 11 | 2.2 | 18 | 8 | 100pcs & 1000pcs |
| 3×80 | 80 | 3.2" | 15 | 2.5 | | | |
| 3×100 | 100 | 4" | 22 | 2.5 | | | |
| 3×120 | 120 | 4.7" | 28 | 2.5 | | | |
| 3×150 | 150 | 6" | 35 | 2.5 | | | |
| 3×165 | 165 | 6.5" | 40 | 2.5 | | | |
| 3×200 | 200 | 8" | 50 | 2.5 | 40 | 18 | 100pcs & 500pcs |
| 4×120 | 120 | 4.7" | 28 | 3.6 | | | |
| 4×150 | 150 | 6" | 35 | 3.6 | | | |
| 4×180 | 180 | 7.1" | 42 | 3.6 | | | |
| 4×200 | 200 | 8" | 50 | 3.6 | | | |
| 4×250 | 250 | 10" | 65 | 3.6 | | | |
| 4×300 | 300 | 11.8" | 82 | 3.6 | 3.6 | | |
| 4×350 | 350 | 13.8" | 90 | 3.6 | | | |



| | | | | | | | |
|--------|------|-------|-----|-----|-----|-----|-----------------|
| 4×380 | 380 | 15" | 102 | 3.6 | | | |
| 5×120 | 120 | 4.7" | 28 | 4.8 | 50 | 22 | 100pcs & 500pcs |
| 5×150 | 150 | 6" | 35 | 4.8 | | | |
| 5×180 | 180 | 7.1" | 42 | 4.8 | | | |
| 5×200 | 200 | 8" | 50 | 4.8 | | | |
| 5×250 | 250 | 10" | 65 | 4.8 | | | |
| 5×300 | 300 | 11.8" | 82 | 4.8 | | | |
| 5×350 | 350 | 13.8" | 90 | 4.8 | | | |
| 5×380 | 380 | 15" | 102 | 4.8 | | | |
| 5×400 | 400 | 15.7" | 105 | 4.8 | | | |
| 5×450 | 450 | 17.7" | 118 | 4.8 | | | |
| 5×500 | 500 | 19.7" | 150 | 4.8 | | | |
| 8×200 | 200 | 8" | 50 | 7.6 | | | |
| 8×250 | 250 | 10" | 65 | 7.6 | | | |
| 8×300 | 300 | 11.8" | 82 | 7.6 | | | |
| 8×350 | 350 | 13.8" | 90 | 7.6 | | | |
| 8×400 | 400 | 15.7" | 105 | 7.6 | | | |
| 8×450 | 450 | 17.7" | 118 | 7.6 | | | |
| 8×500 | 500 | 19.7" | 150 | 7.6 | | | |
| 9×400 | 400 | 15.7" | 105 | 8.8 | 175 | 80 | 100pcs |
| 9×450 | 450 | 17.7" | 118 | 8.8 | | | |
| 9×500 | 500 | 19.7" | 150 | 8.8 | | | |
| 9×550 | 550 | 21.7" | 160 | 8.8 | | | |
| 9×650 | 650 | 25.6" | 190 | 8.8 | | | |
| 9×760 | 760 | 30" | 225 | 8.8 | | | |
| 9×920 | 920 | 36.2" | 265 | 8.8 | | | |
| 9×1020 | 1020 | 40.2" | 295 | 8.8 | | | |
| 12×650 | 650 | 25.6" | 190 | 12 | 250 | 114 | 100pcs |
| 12×760 | 760 | 30" | 290 | 12 | | | |

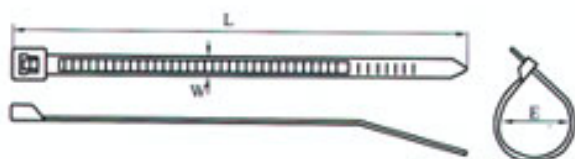

ADD: Floor 1, Building C, ShiFeng Technology Park, HuaNing Rd,
DaLang, LongHua District, Shenzhen, China, 518109

TEL: +86-755-61653518

FAX: +86-755-61653519

E-mail: sales@dicore.cn

Website: www.dicoretubing.com